
Data sheet

Lifting station Aqualift XL 200 L Mono, SPF 1500-S3



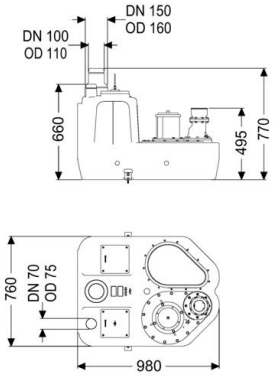

Article information

article number: 11018
EAN code: 4026092056851
Price group: 50

Product advantages

- Different performance classes available
- Pressure sensor for reliable pneumatic level measurement
- Maximum operating reliability due to intelligent control unit

Description

The lifting station for faecal and faecal-free wastewater is equipped with one or two submersible pumps and a backflow preventer. The collection tank made of permanently resistant polymer (PE) offers universal connection options and has a screwed access cover.

General features

Colour	black
Standard	EN 12050-1
Type of wastewater	with sewage
Installation situation	free-standing installation
Delivery state	Installation-ready (electrical components, connection parts must be connected on site)
System type	Mono

Version

Type of system	Single unit
Shut-off valve	without shut-off valve
Retaining bracket for the lift protection	yes
Sound absorption mat	yes
Pump control	Control unit
Backflow preventer	integrated
Pressure pipe connection	vertical

Dimensions

Net weight	64.23 kg
Gross weight	84.23 kg
Length	980 mm
Width	760 mm
Height	788 mm
Packaging dimension: length	1650 mm
Packaging dimension: width	1150 mm
Packaging dimension: height	890 mm


Tank/drain body

Pressure pipe connection (DN)	100
Pressure pipe connection (OD)	110 mm
Connection for manual diaphragm pump (DN)	32
Venting connection (DN)	70
Inlet max. scoring (DN)	200
Inlet nominal size (OD)	110 mm
Inlet nominal size (DN)	100
Number of inlets	1
Pumping volume	120 l
Tank volume	200.00 l

Pumping device

Pump	SPF 1500-S3
Number of pumps	1
Weight, pump	24 kg
Connection type	Direct connection
Protection class	I
Insulation class	F
Cos phi - power factor	0.77
Protection class (pump)	IP 68 (3m/48h)
Temperature monitoring	integrated
Max. temperature (permanent) of conveyed material	40 °C
Max. pumping capacity	40 m³/h
Max. pumping height	8 m
Speed	1415 U/min
Power P1	1.4 kW
Power P2	1.1 kW
Operating mode	S3 - 50 %
Type of pump connection cable	H07RN-F 7G 1.5 mm²
Impeller type	Multi-vane impeller
Free passage	40 mm
Length of mains cable for pump	5 m
Rated current	2,7| A

Pumping capacity

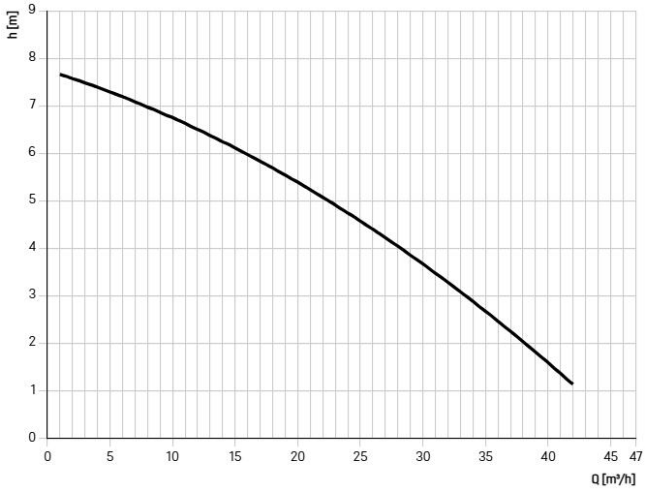

Control

Control unit	Comfort
Operating voltage	400 V
Rated current (max.)	|
Protection class control unit	IP 54
Self-diagnosis system (SDS)	yes
Battery buffering	yes
Multi-line display	yes
Log book function	yes
Potential-free contact	yes
Alarm sensor	Immersion pipe
Level measurement instrument	Immersion pipe
Type of level measurement	pneumatic
Connection type	Direct connection
Length of mains cable for control unit	0 m
GSM interface	yes
Motor protection switch	yes