

Data sheet

Lifting station Aqualift XL 200 L Duo, SPF 1400-S1, Cast-iron shut-off val.



Article information

article number: 11088
EAN code: 4026092057551
Price group: 50

Product advantages

- Different performance classes available
- Pressure sensor for reliable pneumatic level measurement
- Maximum operating reliability due to intelligent control unit

Description

The lifting station for faecal and faecal-free wastewater is equipped with one or two submersible pumps and a backflow preventer. The collection tank made of permanently resistant polymer (PE) offers universal connection options and has a screwed access cover.

General features

Colour	black
Standard	EN 12050-1
Type of wastewater	with sewage
Installation situation	free-standing installation
System type	Duo

Version

Type of system	duo pump
Shut-off valve	Shut-off valve made of cast iron
Backflow preventer	integrated
Pressure pipe connection	vertical

Dimensions

Net weight	186.86 kg
Gross weight	206.86 kg
Packaging dimension: length	1650 mm
Packaging dimension: width	1150 mm
Packaging dimension: height	890 mm


Tank/drain body

Tank volume	200.00 l
-------------	----------

Pumping device

Pump	SPF 1400-S1
Number of pumps	2
Operating mode	S1
Impeller type	Multi-vane impeller
Free passage	40 mm
Length of mains cable for pump	5 m

Pumping capacity

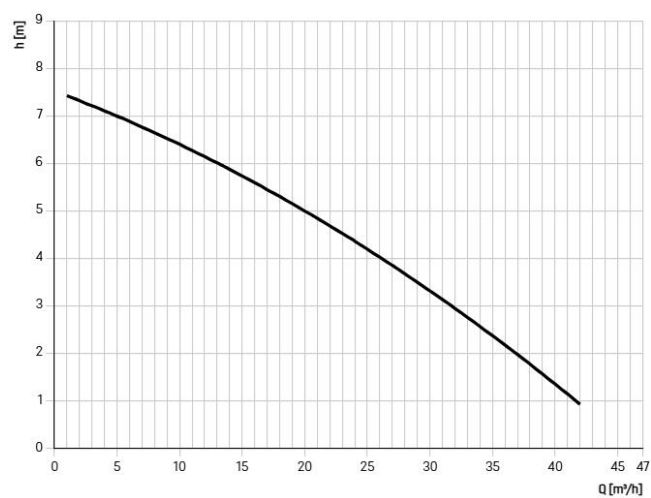

Control

Control unit

Operating voltage

Level measurement instrument

Type of level measurement

Comfort

230 V

Immersion pipe

pneumatic