
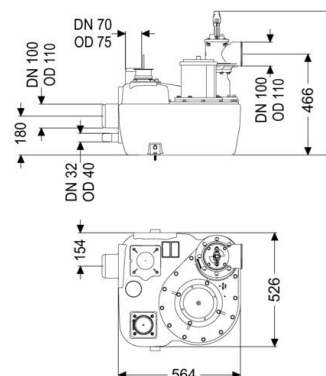


Data sheet

Lifting station Aqualift L Pro Mono, Connect, SPF 3000-S3, shut-off val

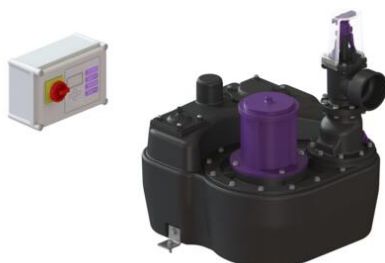

Article information

article number: 28754
EAN code: 4026092054543
Price group: 20

Product advantages

- Different performance classes available
- Pressure sensor for reliable pneumatic level measurement
- Including sound absorption mat

Description

The lifting station for faecal and faecal-free wastewater is equipped with a submersible pump and a backflow preventer. The collection tank made of permanently resistant polymer (PE) offers universal connection options and has a screwed access cover.

General features

Colour	black
Standard	EN 12050-1
Type of wastewater	with sewage
Installation situation	free-standing installation
Delivery state	Installation-ready (electrical components, connection parts must be connected on site)
System type	Mono

Version

Type of system	Single unit
Shut-off valve	Shut-off valve made of polymer
Retaining bracket for the lift protection	yes
Sound absorption mat	yes
Pump control	Control unit
Backflow preventer	integrated
Pressure pipe connection	horizontal

Dimensions

Net weight	49.16 kg
Gross weight	50.45 kg
Length	564 mm
Width	525 mm
Height	664 mm
Packaging dimension: length	645 mm
Packaging dimension: width	530 mm
Packaging dimension: height	570 mm

Tank/drain body

Pressure pipe connection (DN)	100
Pressure pipe connection (OD)	110 mm
Connection for manual diaphragm pump (DN)	32
Venting connection (DN)	70
Distance from centre of outlet pipe to tank bottom	466 mm
Distance pipe bottom inlet to tank bottom	125 mm
Distance from centre of inlet pipe to tank bottom	180 mm
Inlet max. scoring (DN)	150
Inlet nominal size (OD)	110 mm
Inlet nominal size (DN)	100
Number of inlets	1
Pumping volume	20 l
Tank volume	50.00 l

Pumping device

Pump	SPF 3000-S3
Number of pumps	1
Weight, pump	24 kg
Operating voltage	400 V
Protection class	I
Insulation class	F
Cos phi - power factor	0.89
Protection class (pump)	IP 68 (3m/48h)
Temperature monitoring	integrated
Max. temperature (permanent) of conveyed material	40 °C
Max. pumping capacity	47 m³/h
Max. pumping height	16 m
Speed	2845 U/min
Power P1	3.2 kW
Power P2	2.7 kW
Operating mode	S3 - 50 %
Type of pump connection cable	H07RN-F 7G 1.5 mm²
Impeller type	Multi-vane impeller
Free passage	40 mm
Length of mains cable for pump	5 m
Rated current	5,4 A

Pumping capacity



Control

Control unit	Connect Pro
Operating voltage	400 V
Mains frequency	50/60 Hz
Rated current (max.)	9 9 A
Output power (max.)	6.2 kW
Performance Active mode	3.0 W
Protection class control unit	IP 54
Motor protection	yes (electronically)
Type of fuse required (control unit)	C 16 A
Self-diagnosis system (SDS)	yes
Main switch	yes
Battery buffering	yes
Multi-line display	yes
Second Screen	yes (Wi-Fi)
Log book function	yes
Modbus (GLT or gateway)	yes (RTU)
Potential-free contact	yes (2)
Alarm sensor	yes
Ext. audible alarm	yes
Level measurement instrument	Immersion pipe
Type of level measurement	pneumatic
SonicControl Option	yes
Filling Option	yes
USB interface	no