


Data sheet

Submersible pump Aquadive GTF1000 with float switch, 10m



Article information

article number: 28860
EAN code: 4026092044513
Price group: 20

Product advantages

Description

Submersible pump for faecal-free wastewater, type KTP 1000, new designation: GTF 1000

General features

Material	Polymer Stainless steel
Standard	EN 12050-2
Type of wastewater	without sewage
Cable length	10 m

Version

Pump control	Float switch
--------------	--------------

Dimensions

Net weight	10 kg
Gross weight	11.19 kg
Length	195 mm
Width	195 mm
Height	290 mm
Packaging dimension: length	379 mm
Packaging dimension: width	326 mm
Packaging dimension: height	293 mm


Tank/drain body

Pressure pipe connection	R 1 ¼ "
--------------------------	---------

Pumping device

Pump	GTF 1000
Number of pumps	1
Weight, pump	10 kg
Connection type	coded plug
Operating voltage	230 V
Protection class	I
Insulation class	F
Cos phi - power factor	0.97
Protection class (pump)	IP 68 (3m)
Temperature monitoring	integrated
Max. temperature (permanent) of conveyed material	40 °C
Hot water resistance for a short time (2 min)	80 °C
Max. pumping capacity	14.5 m³/h
Max. pumping height	10 m
Speed	2700 U/min
Power P1	1.3 kW
Power P2	0.75 kW
Operating mode	S3 - 50 %
Type of pump connection cable	H07RN-F 3G 1.5 mm²
Impeller type	Multi-vane impeller
Free passage	10 mm
Type of fuse required (pump)	C 16 A
Length of mains cable for pump	10 m
Rated current	5,6 A

Pumping capacity

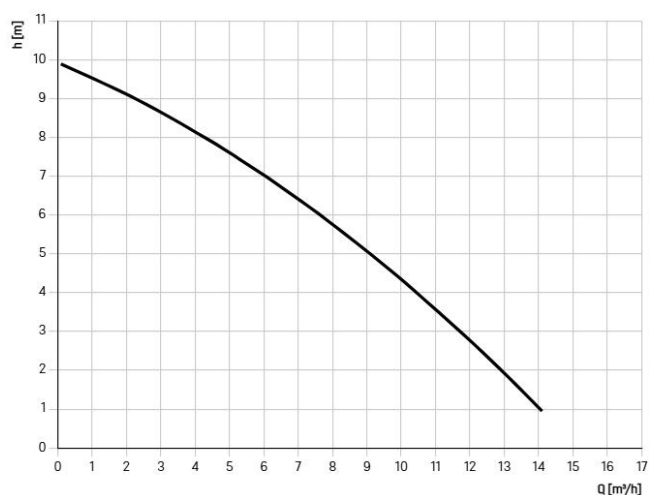

Control

Operating voltage	230 V
Type of level measurement	mechanical
Connection type	coded plug